


637 Series two-way Ball Valve

1/8" to 1/2" NPT, 1/8" to 1/2" BARB, TAPERED BARB,
1/4" to 3/8" JACO, 1/4" to 1/2" PUSH-TO-CONNECT



Configure your exact valve

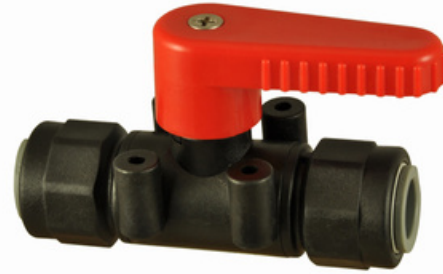

SCAN ME

Design Considerations

- The 637 Two-Way Ball Valves feature Black Glass Filled Polypropylene as the standard material
- Designed as a panel mount, two of the four available screw boss locations will secure the valve
- Handles can be orientated in four positions and can be installed or removed while the valve is under pressure
- Panel mount screws are not supplied

Specifications:

Material	Gray PVC, White PVC Black Glass Filled Polypropylene, White Glass filled Polypropylene, Black Glass Filled Nylon
Type	TWO-WAY - Supports flow and pressure in either direction
Inlet End	1/4 Male NPT, 1/4 Female NPT 3/8 Male NPT, 3/8 Female NPT 1/2 Male NPT, 1/2 Female NPT 1/8 Barb, 1/4 Barb, 3/8 Barb, 1/2 Barb 1/4 Push-to-Connect, 3/8 Push-to-Connect, 1/2 Push-to-Connect 1/4 JACO, 3/8 JACO 3/8 to 5/8 Tapered Barb 1/8 Male NPT 3/8 BIB (Smooth Barb)
Handle Options	1/4 Male NPT, 1/4 Female NPT 3/8 Male NPT, 3/8 Female NPT 1/2 Male NPT, 1/2 Female NPT 1/8 Barb, 1/4 Barb, 3/8 Barb, 1/2 Barb 1/4 Push-to-Connect, 3/8 Push-to-Connect, 1/2 Push-to-Connect 1/4 JACO, 3/8 JACO 3/8 to 5/8 Tapered Barb 1/8 Male NPT 3/8 BIB (Smooth Barb)

Example of how to order:

Type	Inlet Port	Outlet Port	Seal	Handle
Black Polypropylene Two-way	1/2 Female NPT	1/2 Female NPT	Buna	Black ABS

Part Numbers are a description of the valve as read left to-right, Inlet Port to Outlet Port to Outlet Port.

FP 637-8F8F-B,REO HOL = Black Glass Filled Polypropylene Two-Way Panel Mount Ball Valve, 1/2 Female NPT Inlet x 1/2 Female NPT Outlet, Buna Seals, Black ABS Handle